

**DL-AR** PATENT PENDING


# UNIVERSAL HDMI ADAPTER RING STEP-BY-STEP INSTRUCTIONS

The complete assembly (DL-AR) comes with the 5 most popular display adapters used in presentations.


Adapters are also available separately so that you can create your own custom assembly! (HDMI CABLE SOLD SEPARATELY)

Note: You will need a Torx® T-10 Pin Driver and a 1.5mm Hex Key wrench to install and/or modify the DL-AR. Liberty tool kit T10PD contains both tools.


T-10 TORX® PIN DRIVER & 1.5MM HEX KEY WRENCH TOOL KIT **T10PD**

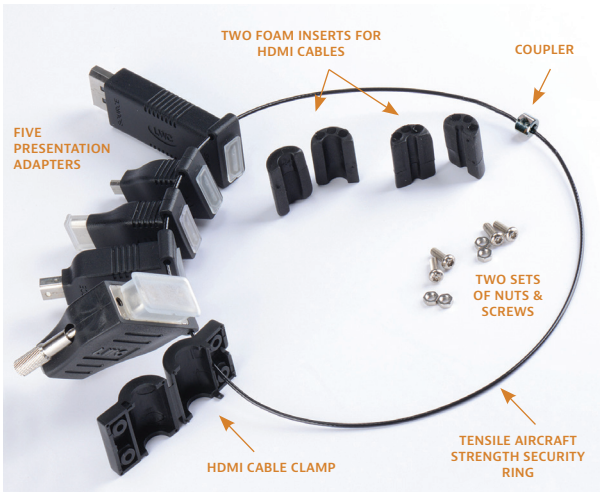


- 1)** If you are changing out any of the adapters, remove the coupler to open the security ring. Ensure the adapters you want are loaded on the security ring.




a. The security ring coupler has a 1.5mm hex set screw holding the two ends of the security cable locked together.



b. Loosen and back out the set screw to release the cable



c. Replace, remove or add adapters as needed for your particular configuration



d. Feed the security ring back into the coupler. Ring ends can overlap.



e. Tighten set screw in coupler to secure your adapters and hold the ring together.

- 2)** Determine the diameter size of the HDMI cable you are using and place the correct foam inserts into the clamp. Several HDMI cable options are available at [www.LibAV.com](http://www.LibAV.com)



Smallest Foam insert is for Micro cables 5mm or less in diameter



Large Foam insert is for most standard cables up to 9mm in diameter



No insert needed for really large HDMI cables above 9mm in diameter

For more info on the adapters and ordering info, go to [www.LibAV.com](http://www.LibAV.com) or scan the code to go directly to the DL-AR web page.



SCAN QR CODE FOR MORE INFO



**LIBERTY  
AV SOLUTIONS**

A SUBSIDIARY OF WESCO DISTRIBUTION, INC.


**RUN WITH US**

[WWW.LIBAV.COM](http://WWW.LIBAV.COM) | 800.530.8998


## UNIVERSAL HDMI ADAPTER RING STEP-BY-STEP INSTRUCTIONS

(Continued From Other Side)

- 3)** Position the Cable Clamp onto the HDMI cable and close shut with your fingers. Position the Cable Clamp so you can feed the HDMI cable into the ends of the adapters comfortably without stressing the connection. Usually this is within 2-3 inches of the end of the HDMI connector molding.

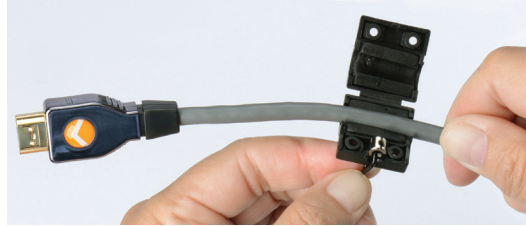

- a. Position the coupler into the space between the two molded screw holes.

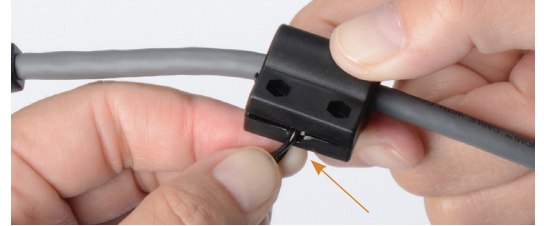

- b) A helpful hint is to bend the two exiting wires straight down; this will enable correct positioning of the wire clamp into the cable clamp cavity.

- 4)** Secure the nuts and screws in the clamp to hold the HDMI cable to the security loop.

A looser insert can be used if you want your cable to slide, permitting it to be placed away when using HDMI only.



- a. Place the nuts into the hex shaped holes.





- b. Holding them in place with your finger, turn clamp over and then place the Torx® screws into the holes and tighten down with the Torx® Pin Driver.



The DL-AR assembly is now ready for use! The HDMI cable will stay connected to the security ring, and the variety of adapters for the next presenter will stay put and never get lost or go missing.



More adapters are in development!  
Connect for all the latest updates.

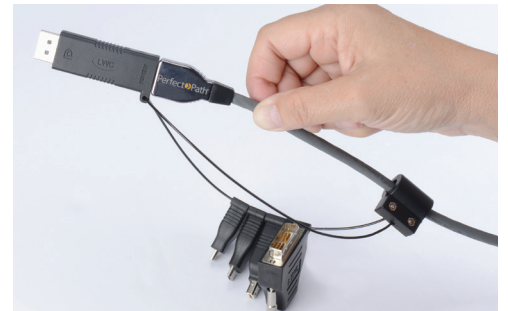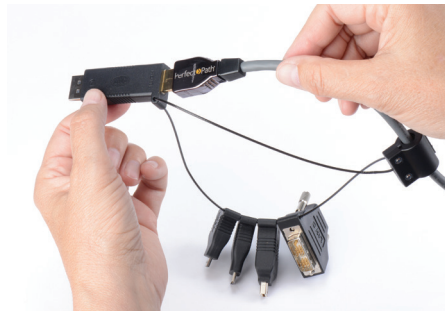

**LIBERTY  
AV SOLUTIONS**

A SUBSIDIARY OF WESCO DISTRIBUTION, INC.

**RUN WITH US**

WWW.LIBAV.COM | 800.530.8998