

6771UL-6780UL Series

Professional Installation Projectors ideal for higher education, house of worship, corporate and museum applications



4K UHD
READY

Powerful installation projectors equipped to take on the most demanding integration projects

Legacy Support

- Customers utilizing previous Dukane Series projectors can use their existing lenses. Eliminates the costly expense of purchasing a new lens. The time consuming efforts and costs associated with reinstallation are eliminated. Supports the legacy manually adjustable lenses, NP11FL, NP12ZL, NP13ZL, NP14ZL and NP15ZL.



Integrated

- 4K Ready - Display stunning 4K 60P content using Dukane's proprietary high performance video processing/scaling chip without the loss of critical details. HDR10 and BT.2020 signals from "Ultra HD Blu-ray" and "4K TV broadcasting" are supported on all digital inputs.
- Integrated software applications such as AMX Beacon, Crestron Roomview, Extron XTP and PJ Link
- allow for complete control system support
- Lower the cost of your installation by eliminating the need for costly reprogramming of a control system. (supports competitors commands, call Dukane for complete list)

4K UHD
READY

Flexible

- Enjoy greater installation flexibility with motorized optional bayonet style lenses providing quick and easy exchanges. Lens throw distances range from 2.5 to 68.5 ft
 - New NP44ML-01LK UST lens placing the projector above the screen and out of site (installation may place the projector above the ceiling line)
- Tilt-free installation capabilities make these projector ideal for almost any install environment, including portrait orientation
- Up to 60% vertical lens shift and +/- 30% horizontal lens shift capabilities make alignment easy




NaViSet Administrator 2

This software is an all-in-one remote support solution that runs from a central location and provides monitoring, asset management and control functionality for a majority of Dukane display devices and Windows computers. It is ideal for multi-device installations over larger infrastructures.



Laser

- Images appear immediately after power on due to instantaneous start up of the laser
- Dual blue laser systems provide best in class white balance over the life of the projector
- Inorganic optical components create longer lifetime and greater peace of mind

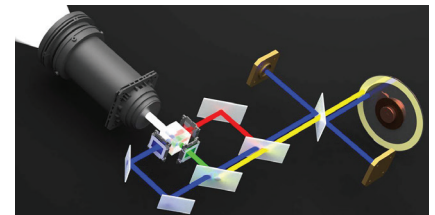


GET CONNECTED WITH A WIDE SELECTION OF INPUTS

- **Multiple Digital computer inputs** ensure quick switching between presentations
- **Three audio inputs (one mini stereo [HDMI1™ & HDMI2™, and HDBaseT])** make it easy to add sound to enhance your presentations
- **21:9 Aspect Ratio** supported for engaging meeting spaces

Digital Inputs

Among the PV Series wide selection of inputs are dual HDMI w/ HDCP for connecting to high-definition sources such as Blu-ray players, cable boxes, satellite receivers and personal computers.

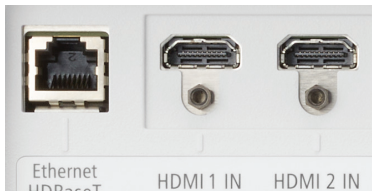

Input panel cover

This optional accessory creates a clean look for your installation, while hiding signal cables and the power cord.



Remote control

Wired and wireless backlit remote allows you to adjust for complete control of the projector's menu structure in a well lit or dark environment. Direct controls such as lamp mode, aspect ratio, volume and input selection eliminates multiple button pushes.



ADVANCED SOFTWARE FEATURES


10,000-hour filter life

Dukane is committed to designing its products to provide long lifecycles. This virtually maintenance-free filter reduces the frequency at which cleaning is required, thereby decreasing total cost of ownership.



Roll-free

The projector can be rotated freely (360°) to orient the image depending on the installation requirements.



ProAssist™

Projector management software for installation professionals provides network based projector control including input switching, picture, and geometric correction.



UNIQUE FEATURES

Variable audio-out enables the remote control to be used to adjust volume of self-powered external speakers that are connected to the projector. In stand-by mode, the audio-out stays active, allowing the last input used to pass to the self-powered external speakers.

Advanced AccuBlend™ ensures detailed images when non-native resolution sources are connected to the projector

64-step image magnification with location control

Built-in HTTP page for control and monitoring over a LAN network. Email notification of error messages or lamp end-of-life can be sent to remote locations.

WARRANTY

Registered owners receive a 5-year parts and labor warranty on manufacture defects.

IN THE BOX


Remote control, batteries, power cord, user's manual on CD-ROM, quick start guide, product registration card.

ACCESSORIES

RMT-PJ40	Replacement Remote Control
Optional Lenses	NP11FL, NP12ZL, NP13ZL, NP14ZL, NP15ZL, NP50ZL, NP40ZL, NP41ZL, NP43ZL, NP44ML-01LK
NP10CV	Terminal Cover
NP10CV-B	Terminal Cover
PA600CM	Ceiling mount
AEC006009	Adjustable Extension Column, 6" - 9"
AEC012018	Adjustable Extension Column, 12" - 18"
AEC0203	Adjustable Extension Column, 2' - 3'
AEC0305	Adjustable Extension Column, 3' - 5'
NP01PW1	Power Cord
RGBCBL-PJPX	RGB Signal Cable

ORDERING MODEL NUMBERS

6771UL-L
6771UL-B-L
6780UL
6780UL-L
6780UL-L
6780UL-B-L

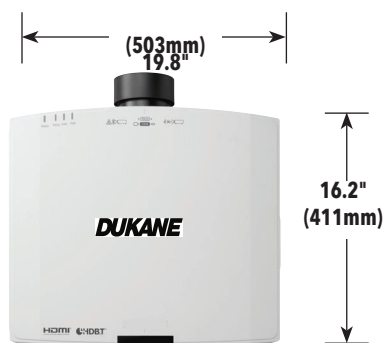

		6771UL-L	6780UL	
Light Output (lumens)		7100	8,000	
Resolution	Native	WUXGA		
	Maximum	4K 4096 x 2160		
Aspect Ratio		16:10 (Supports 4:3, 16:9, 21:9)		
Contrast Ratio (up to)		3,000,000:1 (with Dynamic Contrast)		
Laser Life (up to)		20,000 hours		
Screen Size (diagonal)		40 to 150 in. / 1.02 to 3.8m, NP11FL: 30 to 500 in. / 0.76 to 12.7m, NP12ZL: 40 to 500 in. / 1.02 to 12.7m, NP13ZL: 50 to 500 in. / 1.27 to 12.7m, NP50ZL, NP40ZL, NP41ZL, NP43ZL, 60 to 500 in. / 1.52 to 12.7m, NP14ZL, NP15ZL: 100 to 400 in. / 2.54 to 10.16m, NP44ML-01LK		
Throw Ratio	NP11FL	0.79:1		
	NP12ZL	1.16 - 1.52:1		
	NP13ZL	1.46 - 2.95:1		
	NP14ZL	2.90 - 4.64:1		
	NP15ZL	4.59 - 7.02:1		
	NP44ML-01LK	0.32:1		
	NP50ZL	0.6-0.76:1		
	NP40ZL	0.79 - 1.11:1		
	NP41ZL	1.30 - 3.02:1		
	NP43ZL	2.99 - 5.93:1		
Projection Distance		2.5 to 68.5 ft. / 0.74 to 20.9m		
Projection Angle		10.3 to 10.8° tele / 13.7 to 14.5° wide		
Lens	Zoom	Manual	Motorized	
		NP11FL	-	
		NP12ZL	1.3x	
		NP13ZL	2.0x	
		NP14ZL	1.6x	
		NP15ZL	1.52x	
		NP44ML-01LK	1.0x	
		NP50ZL	1.25x	
		NP40ZL	1.4x	
		NP41ZL	2.3x	
	NP43ZL	2.0x		
	Focus	Manual	Motorized / Manual	
		NP11FL	F=2.3, f= 13.2mm, 2.6lbs. / 1.2 kg	
		NP12ZL	Manual zoom / focus, F=2.2 to 2.69, f= 19.4 to 25.3mm, 2.6lbs. / 1.2 kg	
		NP13ZL	Manual zoom / focus, F= 1.7 to 2.37, f= 24.2 to 48.6mm, 1.6lbs. / 0.84 kg	
NP14ZL		Manual zoom / focus, F= 2.2 to 2.64, f= 48.5 to 77.6mm, 2.2lbs. / 1.0 kg		
NP15ZL	Manual zoom / focus, F= 2.2 to 2.7, f= 76.6 to 116.5mm, 2.2lbs. / 1.0 kg			
NP44ML-01LK	Motorized zoom / focus, F=2.0, f= 6.27, 6.8 lbs. / 3.1 kg			
NP50ZL	Motorized zoom / focus, F=1.9 to 2.1, f= 49.7 to 99.8mm, 5.5 lbs. / 2.5 kg			
NP40ZL	Motorized zoom / focus, F=2.0 to 2.5, f= 13.3 to 18.6mm, 3.5lbs. / 1.6 kg			
NP41ZL	Motorized zoom / focus, F=1.7 to 2.0, f= 21.8 to 49.8mm, 3.7 lbs. / 1.7 kg			
NP43ZL	Motorized zoom / focus, F=2.2 to 2.6, f= 49.7 to 99.8mm, 3.7 lbs. / 1.7 kg			
Shift	+50/-10% Vertical, +/-30% Horizontal			
Shutter	Laser Shutter			
Keystone Correction	+/- 30° horizontal, +/- 30° vertical			
Synchronization Range	Horizontal	24-100kHz		
	Vertical	50-85Hz		
Supported Video Standards	NTSC, NTSC4.43, PAL, PAL-60, PAL-M, PAL-N, SECAM			
SD/HD Video Signal Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 4K			
PC Signal Compatibility	VGA, SVGA, XGA, SXGA, SXGA+, UXGA, WUXGA, Quad HD			
Macintosh Compatibility	Yes			
Input Terminals	RGB1 (analog)	HDMI (V2.0) w/ HDCP (V1.4/2.2)		
	RGB2 (digital)	HDMI (V2.0) w/ HDCP (V1.4/2.2)		
	RGB3 (digital)	HDBaseT w/ HDCP (V1.4/2.2)		
	Audio Out	Stereo Mini Jack		
External Control	RS-232, IR, Wired Remote, HDBaseT, DDC/CI, RJ-45, USB (USB 2.0)			
Sync Compatibility	Separate Sync / Composite Sync / Sync on G			
Power Requirements	100-240VAC, 50/60 Hz			
Input Current	5.3A - 2.2A	6.1A - 2.5A		
Power Consumption	(ECO off/ECO Mode/Standby/Power Saving)			
	456W / 412W / 1.7W / 0.16W	490W / 445W / 1.7W / 0.16W		
Installation Orientation	Floor/Front, Floor/Rear, Ceiling/Front, Ceiling/Rear			
Product Dimensions (WxDxH)	19.8 x 16.2 x 6.6 in. / 503 x 411 x 168 mm			
Net Weight	24.7 lbs. / 11.2 kg			
Shipping Dimensions (WxDxH)	23.3 x 19.3 x 10.2 in. / 591 x 491 x 259 mm			
Gross Weight	29.5 lbs. / 13.4 kg			
Fan Noise	40 dB normal / 31 dB eco	42 dB normal / 32 dB eco		
Regulations	US	USA UL60950-1: 2nd edition, FCC Part15 Subpart B(ANSI C63.4-2014)		
	Canada	CAN/CSA C22.2 No.62368-1-18,3rd Edition, ICES-003 Issue 7(ANSI C63.4-2014)		
Operating	Temperature	32-113°F / 0-45°C		
	Humidity	20 to 85% Humidity (Non-Condensing)		
Storage	Temperature	14-122°F / -10 50°C		
	Humidity	20% - 80% (non-condensing)		
Ordering Model Number	6771UL-L	6780UL*		

* Lenses does not ship with the projector. Additional accessories are available, including screens, carts, mount accessories and replacement cables.

